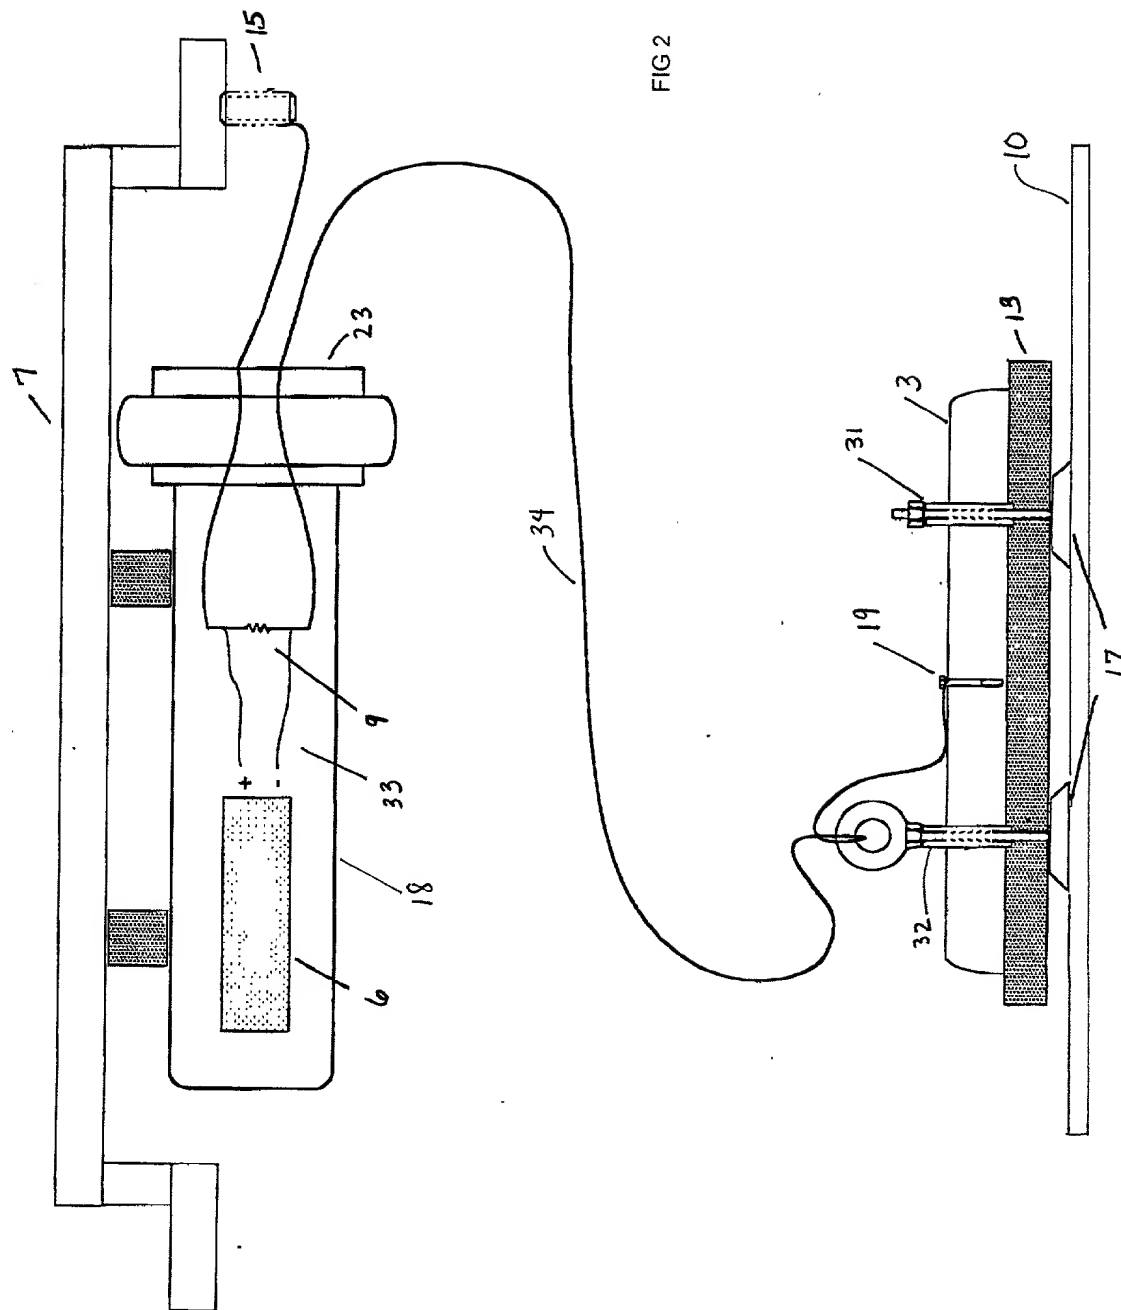


The diagram illustrates a mechanical assembly within a rectangular frame (10). At the top, a horizontal bar (1) is shown. A bracket (6) is positioned below the bar, with a component (18) inside it. A vertical rod (2) is attached to the bracket. Two clamps, labeled 2a and 2b, are shown on the rod. At the bottom, a base (5) is shown. A cable (4) is connected to the base and extends to a component (3) on the right. The entire assembly is enclosed in a rectangular frame (10).

FIG. 1



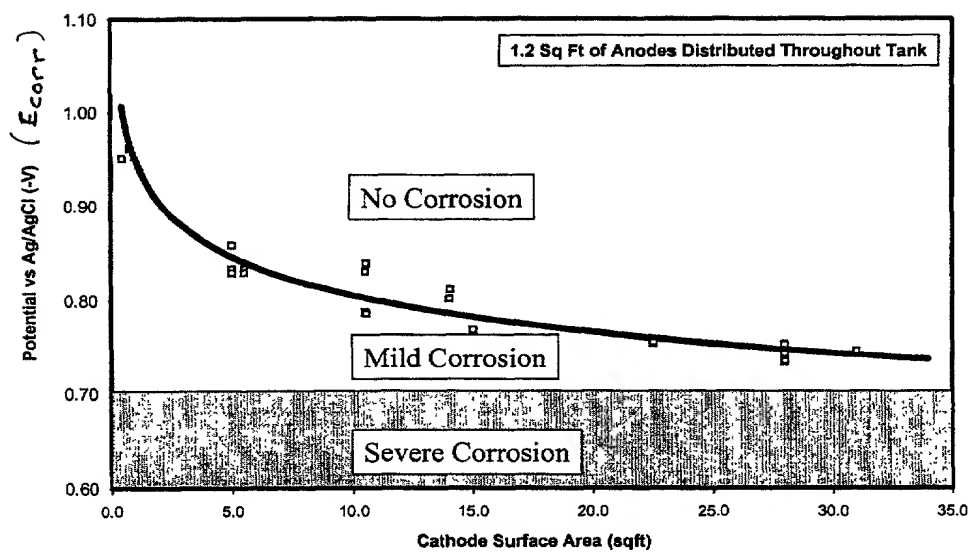


FIG. 3

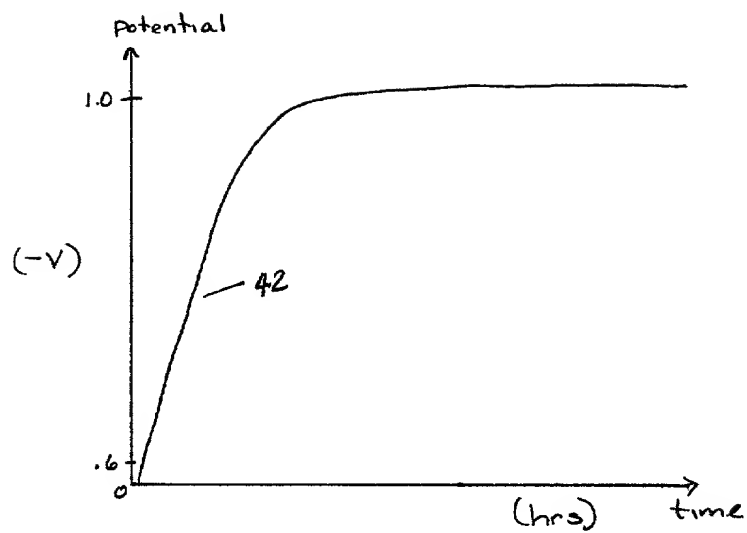


FIG. 4A

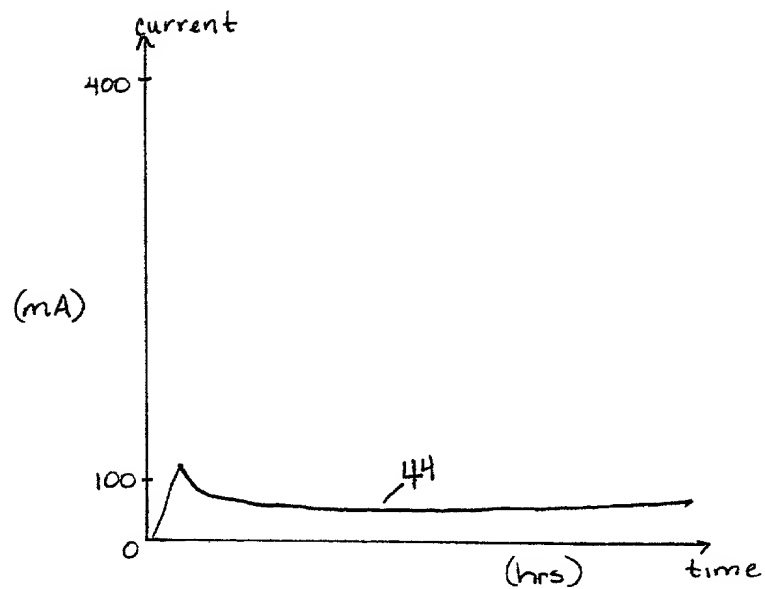


FIG. 4B

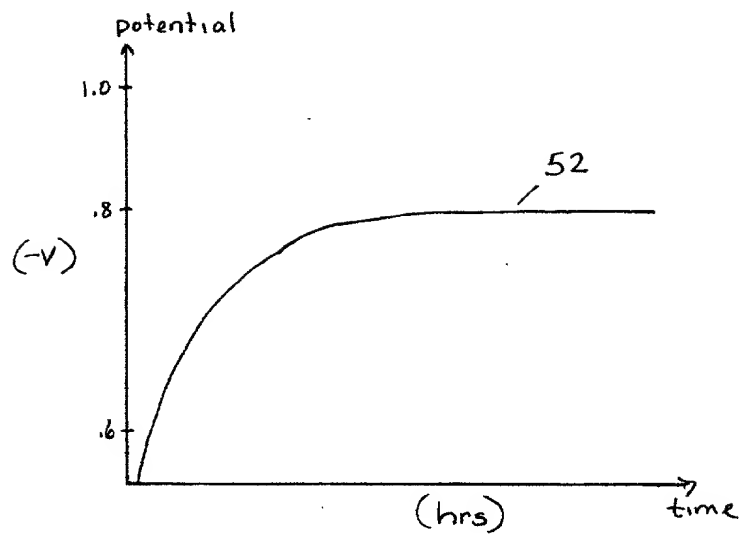


FIG. 5A

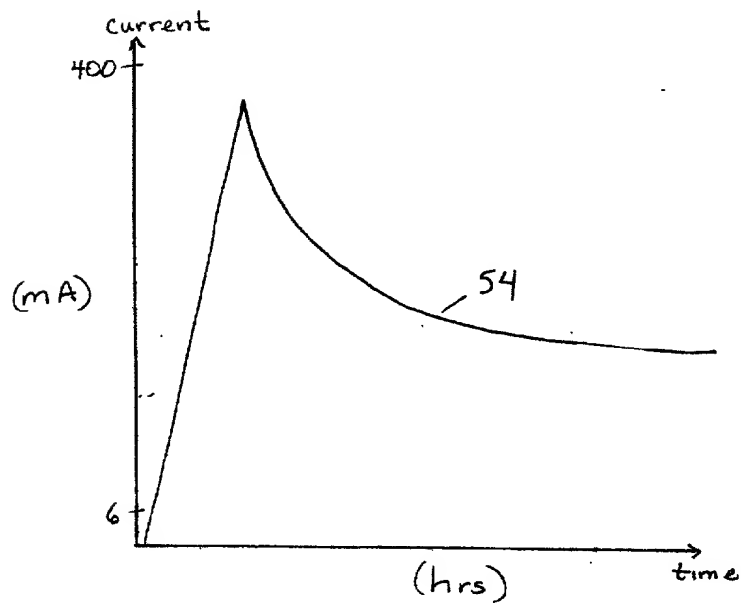


FIG. 5B

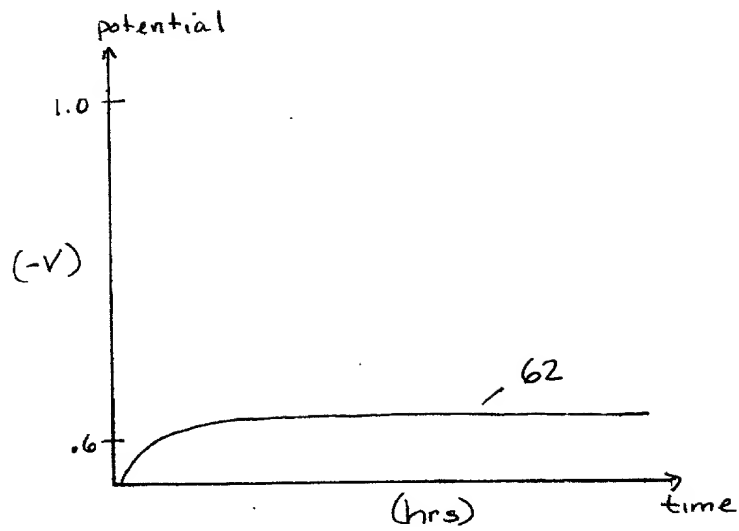


FIG. 6A

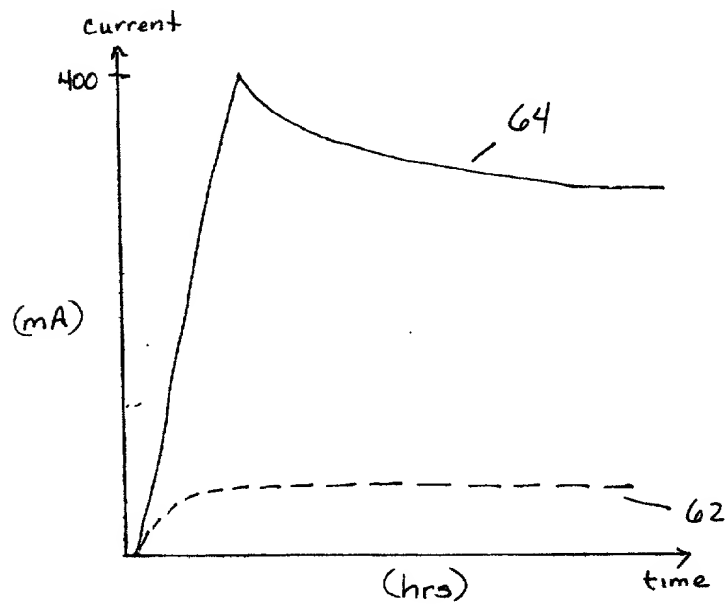


FIG. 6B

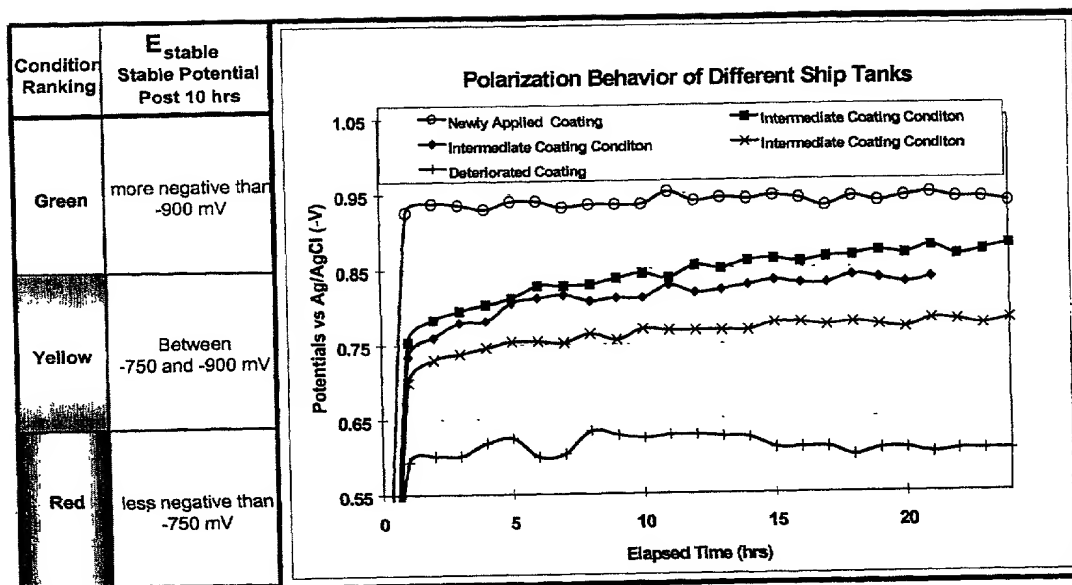


FIG 7

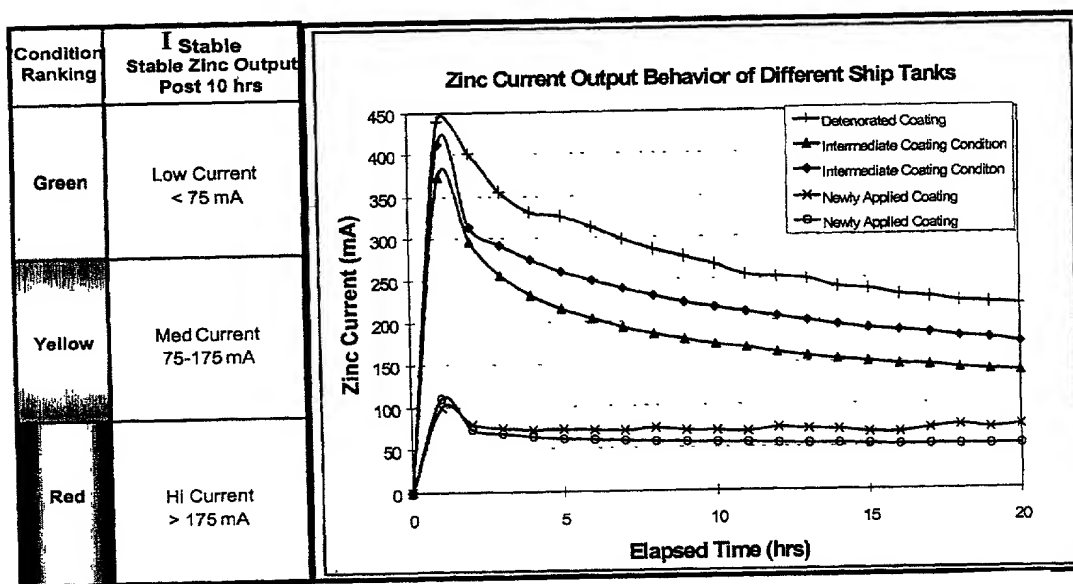


FIG 8

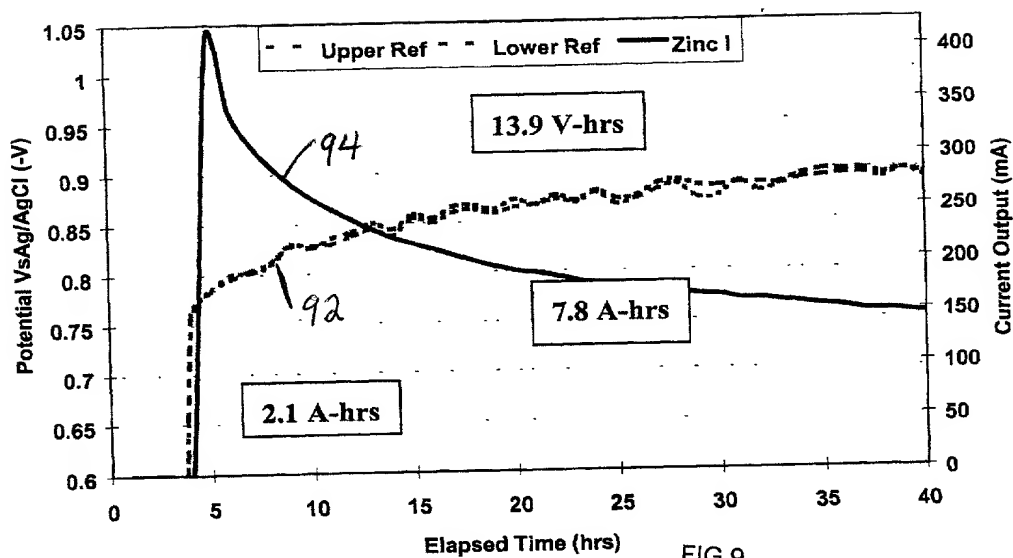


FIG 9

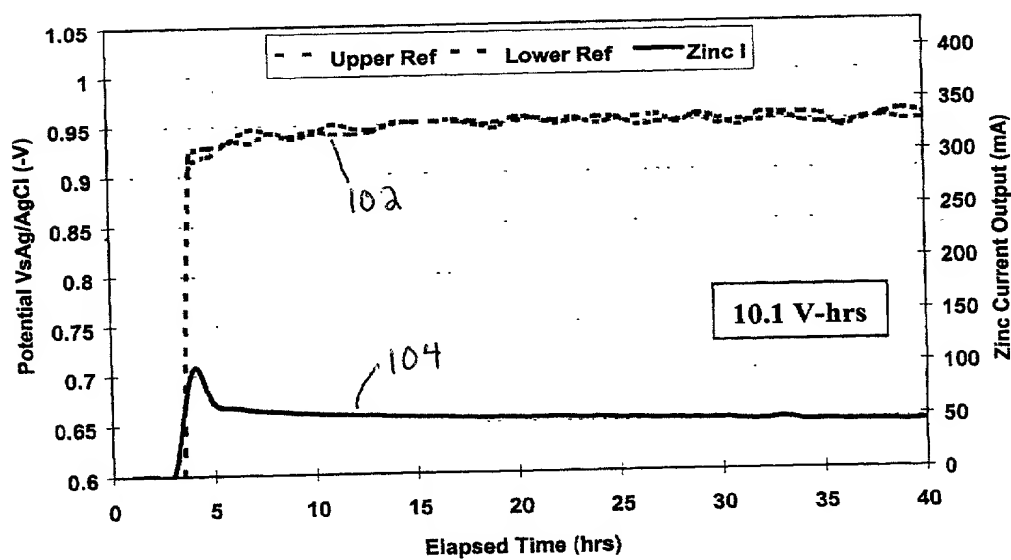


FIG 10